


# 6 EASY STEPS

## Flat Section



### 1 Install End Posts

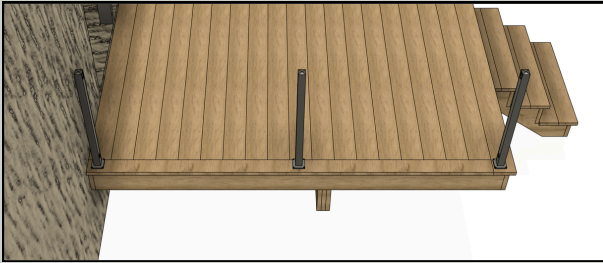


- Position first end post near deck edge where lag bolts secure to adequate blocking/support
- Square post with deck edge and mark holes
- Position second end post where required with the holes facing the first end post

### 3 Measure and Install Rails




- Measure the distance from post to post and cut top and bottom rails that fit in. Insert rails into slots in end posts

### 5 Measure and Order Glass

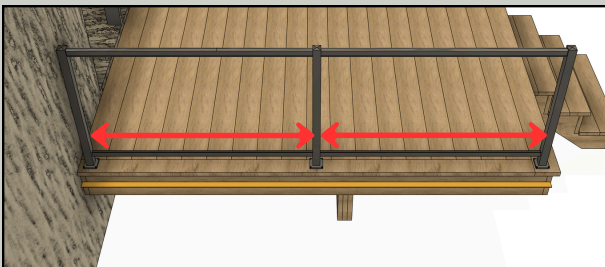


- Measure distance from post to post
- Submit measurements to the office for ordering and confirm how the measurement was taken
- Standard glass panels range from 36" to 54" in 1" increments
- Download Glass Order Form and email completed form to [info@canadadeckandrail.com](mailto:info@canadadeckandrail.com)

### 2 Install Additional Posts (If Applicable)

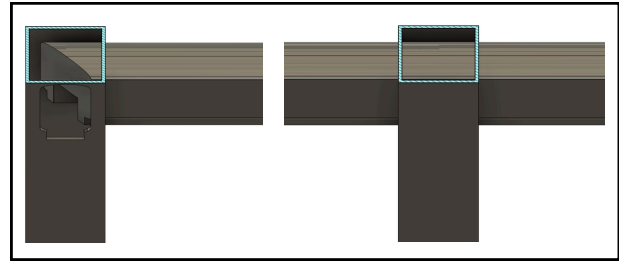


- Corner posts: Cut rails at 45-degree angle to fit into corner post
- Line posts: Slide rails through line post. A splice is placed inside the rails to connect longer sections

### 4 Level and Secure

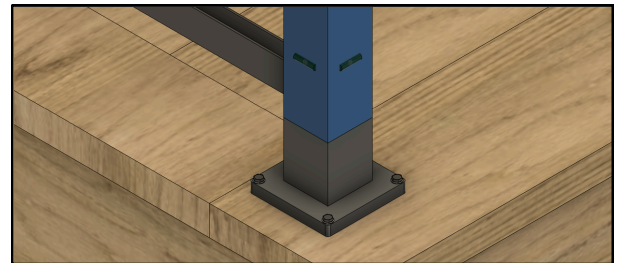

- Level each post
- Secure bottom rail using two 1.5-inch screws (one per side) on inside of bottom rail or outside of post to prevent moving
- Do not add the screws on the top rail just yet (we will do that later on)

### 6 Install Glass Panels

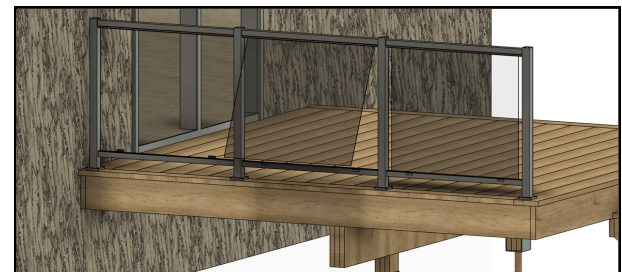

- Cut 2 rubber gasket sections to fit precisely inside top and bottom rails
- Place 2 glass blocks on the inside of the gasket in the bottom rail
- Insert glass by sliding the panel up into the top rail, swing in line with the bottom rail, and gently push downwards